

OEM Orientation Sensor

Model V9.1




Small, rugged and lightweight, the Model V9.1 Orientation Sensor is an extremely compact, six-degree-of-freedom orientation board that gives true orientation in world coordinates. It features a wide range of VIN, from 2V to 18V. In addition to true orientation, raw output of the 3-axis magnetometer, 3-axis accelerometer and pressure sensors are easily accessible. Customizable user-settable addresses allow multiple sensors to be daisy-chained together. A USB to RS485 adapter is available to provide power and communication.

Applications

- Robotics
- Marine
- Research
- OEM industrial products

Features

- Small footprint
- Unique serial address allows multiple sensors on data bus
- 12 bar pressure sensor

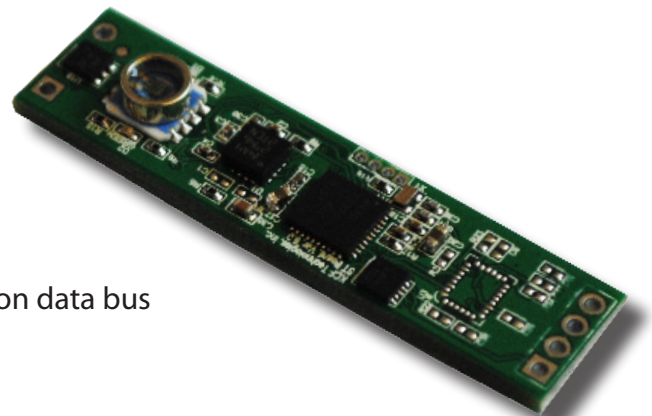

Note: 3D orientation uses accelerometer and magnetometer sensors only.

Specifications

Sensors

Accelerometer

Range: x,y,z: +/- 2 g
or +/- 6 g
Bandwidth: x,y,z: 1.8 kHz
Nonlinearity: 0.50% FS

Magnetometer

Range: +/- 6 Gauss
Nonlinearity:
+/- 1 gauss 0.1% FS
+/- 3 gauss 0.4% FS
+/- 6 gauss 1.4% FS
Bandwidth: 5 MHz

Pressure

Range: 0-12 bar
Maximum: 30 bar
Resolution: 26 mbar

General

Orientation Range: x,y,z: 360°
A/D Resolution: 10 bit
Orientation Accuracy: +/- 0.5° typical for static test conditions
+/- 5.0°
Orientation Resolution: +/- 2.0°
Output Options: Acceleration (x,y,z), Magnetic field (x,y,z),
Actual orientation in world coordinates,
Angular rate (y,z)

Baud rate: 115200 baud
Supply voltage: 2-20 volts DC
Power consumption: Less than 320 mW

Mechanical

Connectors: 4 holes, 0.05" dia,
0.1" spacing on circuit board
Dimensions: 12.7 mm x 51 mm x 6.2 mm /
0.5" x 2.0" x 0.24"
Weight: 3.8 grams / 0.134 ounces
Shock Limit: 1000 g (unpowered), 500 g (powered)
Operating Temp: -40°C to +75°C / -40°F to +167°F

Product Information:
KCF Technologies, Inc.
www.kcftech.com
email: sales@kcftech.com



336 S. Fraser Street
State College, PA 16801
tel: 814-867-4097
fax: 814-690-1579